


Technical data



UltraCut FBS II SK - counter-sunk head

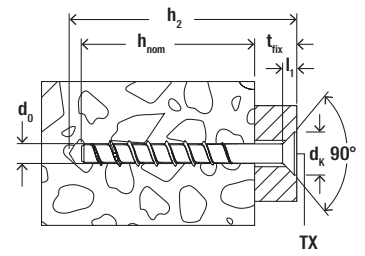


Item	Item No.	Approval ETA	Drill hole diameter d_0 [mm]	Min. drill hole depth for through fixings h_2 [mm]	Screw $d_a \times l_s$ [mm]	Screw-in depth with fixture thickness h_{nom1} / t_{fix} [mm]	Screw-in depth with fixture thickness h_{nom2} / t_{fix} [mm]	Screw-in depth with fixture thickness h_{nom3} / t_{fix} [mm]	Drive	Sales unit [pcs]
FBS II 8x60 10/- SK	536880	●	8	70	10 x 60	50 / 10	- / -	- / -	TX40	50
FBS II 8x80 30/15 SK	536881	●	8	90	10 x 80	50 / 30	65 / 15	65 / 15	TX40	50
FBS II 8x90 40/25 SK	536882	●	8	100	10 x 90	50 / 40	65 / 25	65 / 25	TX40	50
FBS II 10x65 10/-/- SK	536884	●	10	75	12 x 65	55 / 10	- / -	- / -	TX50	50
FBS II 10x80 25/15/- SK	536885	●	10	90	12 x 80	55 / 25	65 / 15	- / -	TX50	50
FBS II 10x95 40/30/10 SK	536886	●	10	105	12 x 95	55 / 40	65 / 30	85 / 10	TX50	50
FBS II 10x100 45/35/15 SK	536887	●	10	110	12 x 100	55 / 45	65 / 35	85 / 15	TX50	50
FBS II 10x120 65/55/35 SK	536888	●	10	130	12 x 120	55 / 65	65 / 55	85 / 35	TX50	50

Technical data



UltraCut FBS II US R - hexagon head with molded washer, stainless steel R

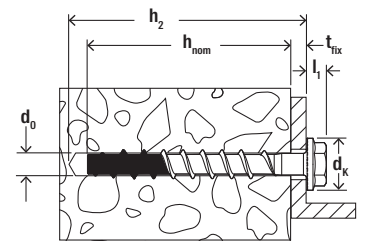

Item	Item No.	Approval ETA	Drill hole diameter d_0 [mm]	Min. drill hole depth for through fixings h_2 [mm]	Screw-in depth with fixture thickness h_{nom1} / t_{fix} [mm]	Screw-in depth with fixture thickness h_{nom2} / t_{fix} [mm]	Screw-in depth with fixture thickness h_{nom3} / t_{fix} [mm]	Drive	Sales unit [pcs]
FBS II 8x60 10/- US R	543565	●	8	70	50 / 10	- / -	- / -	SW 13	50
FBS II 8x70 20/5 US R	543566	●	8	80	50 / 20	- / -	65 / 5	SW 13	50
FBS II 8x80 30/15 US R	543567	●	8	90	50 / 30	- / -	65 / 15	SW 13	50
FBS II 8x90 40/25 US R	543568	●	8	100	50 / 40	- / -	65 / 25	SW 13	50
FBS II 10x60 5/-/- US R	543569	●	10	70	55 / 5	- / -	- / -	SW 15	50
FBS II 10x70 15/5/- US R	543570	●	10	80	55 / 15	- / -	65 / 5	SW 15	50
FBS II 10x80 25/15/- US R	543571	●	10	90	55 / 25	- / -	65 / 15	SW 15	50
FBS II 10x90 35/25/5 US R	543572	●	10	100	55 / 35	65 / 25	85 / 5	SW 15	50
FBS II 10x100 45/35/15 US R	543573	●	10	110	55 / 45	65 / 35	85 / 15	SW 15	50
FBS II 10x120 65/55/35 US R	543574	●	10	130	55 / 65	65 / 55	85 / 35	SW 15	50
FBS II 12x70 10/-/- US R	543575	●	12	80	60 / 10	- / -	- / -	SW 17	20
FBS II 12x85 25/10/- US R	543576	●	12	95	60 / 25	- / -	75 / 10	SW 17	20
FBS II 12x110 50/35/10 US R	543577	●	12	120	60 / 50	75 / 35	100 / 10	SW 17	20
FBS II 12x130 70/55/30 US R	543578	●	12	140	60 / 70	75 / 55	100 / 30	SW 17	20